


TR TOTAL RUBBER DUCTING





CONTENTS

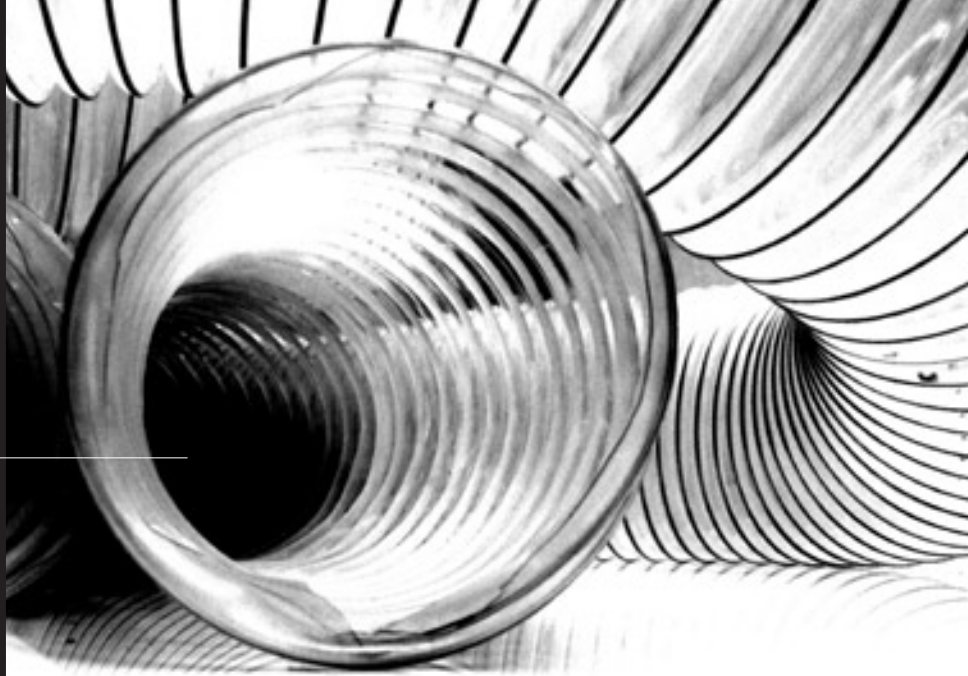

| PRODUCT NAME | APPLICATIONS | PAGE |
|----------------------|---|------|
| DUCTAFLEX | Dust Extractors/Vineyard Sprayers | 1 |
| PVC BLUE | Dust + Fume Transfer | 1 |
| THERMORESISTENTE KLL | Ventilation Blowers/Cool Rooms | 2 |
| EXTRACTAFLEX PE | Portable Ventilation Blowers | 2 |
| SUPERFLEX CALOR | Grain Augers + Hoppers/Cotton Pickers/Engine Bays | 3 |
| TUFLEX | Dust Extractors | 3 |
| SUPERFLEX PU L | Truck Mounted Vacuum | 4 |
| OREGON PU ANTISTATIC | >> Food Grade << Smooth Bore Abrasive Transfer | 5 |
| SUPERFLEX PU + H | >> Food Grade << Smooth Bore Abrasive Transfer | 6 |
| ANTISTATIC PU | Hazardous Product Transfer | 6 |
| DETROIT | Vehicle Workshop Fume Extraction | 7 |
| HIGH TEMP W | Foundries | 7 |
| INDUSTROFLEX | High Volume Air Movement | 8 |
| ABRASAFLEX | H.D. Abrasive Transfer | 8 |
| SANTOPRENE | Mechanically Strong | 9 |
| CUSTOM MADE DUCT | Special Application | 9 |

Items in light print are not usually stocked and are available on request



D1DUC

DUCTAFLEX

| Product Code | I.D. mm | O.D. mm | Weight Kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|---------|--------------|----------------------------|----------------|---------|
| D1DUC051 | 51 | 59 | 0.40 | - | 50 | 20 |
| D1DUC064 | 64 | 73 | 0.56 | - | 60 | 20 |
| D1DUC076 | 76 | 86 | 0.74 | - | 75 | 20 |
| D1DUC0102 | 102 | 114 | 1.07 | - | 90 | 20 |
| D1DUC0125 | 127 | 139 | 1.43 | - | 120 | 20 |
| D1DUC0152 | 152 | 164 | 1.80 | - | 150 | 20 |
| D1DUC160 | 160 | 172 | 1.93 | - | 160 | 20 |
| D1DUC180 | 180 | 192 | 2.30 | - | 180 | 20 |
| D1DUC0203 | 203 | 216 | 2.40 | - | 240 | 20 |
| D1DUC0252 | 254 | 268 | 3.65 | - | 320 | 10 |
| D1DUC0304 | 305 | 329 | 4.00 | - | 350 | 10 |

Common Applications

Fume extraction ducting. Gas extraction from welding sites.
Dust extraction from wood working machines.
Excellent for vineyard spray cart applications.

Advantages

Excellent anti abrasion characteristics.
Light weight.
Available in long lengths.
External helix protects against abrasive damage.

Structure


Smooth bore PVC with an external reinforcing helix of hardened PVC.

Temperature Range

-5 °C to +60 °C

Colour

Sizes 50mm + Grey
Small bore sizes listed in P.V.C hose book as (sink hose).

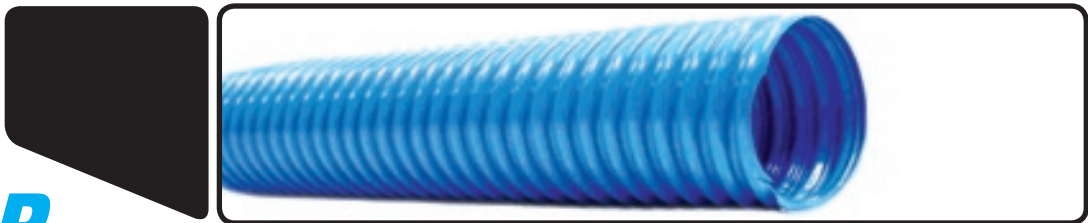

D1AD

PVC - Blue Duct

| Product Code | I.D. mm | Wall Thick cm | Weight Kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|---------------|--------------|----------------------------|----------------|---------|
| D1AD051 | 51 | 0.50 | 0.33 | 2 | 40 | 10 |
| D1AD063 | 63 | 0.50 | 0.40 | 1.7 | 55 | 10 |
| D1AD076 | 76 | 0.55 | 0.55 | 1.7 | 65 | 10 |
| D1AD102 | 102 | 0.60 | 0.73 | 1.3 | 85 | 10 |
| D1AD127 | 127 | 0.60 | 1.00 | 1.0 | 105 | 10 |
| D1AD158 | 152 | 0.65 | 1.40 | 0.8 | 125 | 10 |
| D1AD180 | 180 | 0.65 | 1.70 | 0.5 | 150 | 10 |
| D1AD203 | 203 | 0.65 | 2.10 | 0.4 | 165 | 10 |
| D1AD254 | 254 | 0.70 | 2.55 | 0.4 | 210 | 10 |
| D1AD305 | 305 | 0.70 | 3.10 | 0.3 | 250 | 10 |
| D1AD356 | 356 | 0.70 | 3.60 | 0.3 | 300 | 10 |
| D1AD406 | 406 | 0.70 | 4.20 | 0.3 | 359 | 10 |

Common Applications

Suction and discharge of abrasive powders, fumes, shavings and vapours.

Colour: Blue.

Clear on request.

Structure

PVC with embedded wire helix.

Temperature Range

-10 °C to + 50 °C

D1TKLL

THERMORESISTENTE KLL/125



| Product Code | I.D. mm | Weight kg/mt | Max W.P Bar | Vacuum MT.H ₂ O | Bend Radius Mm | Coil Length mt |
|--------------|---------|--------------|-------------|----------------------------|----------------|----------------|
| D1TKLL040 | 40 | .80 | 0.55 | 1 | 20 | 12 |
| D1TKLL051 | 51 | .105 | 0.50 | 0.95 | 25 | 12 |
| D1TKLL063 | 63 | .125 | 0.45 | 0.90 | 31 | 12 |
| D1TKLL070* | 70 | .140 | 0.43 | 0.85 | 35 | 12 |
| D1TKLL076 | 76 | .155 | 0.40 | 0.80 | 36 | 12 |
| D1TKLL089* | 89 | .175 | 0.30 | 0.70 | 44 | 12 |
| D1TKLL102 | 102 | .180 | 0.25 | 0.65 | 51 | 12 |
| D1TKLL127 | 127 | .220 | 0.18 | 0.45 | 63 | 12 |
| D1TKLL133* | 133 | .230 | 0.16 | 0.40 | 66 | 12 |
| D1TKLL140* | 140 | .245 | 0.15 | 0.38 | 70 | 12 |
| D1TKLL152 | 152 | .325 | 0.14 | 0.35 | 76 | 12 |
| D1TKLL165* | 165 | .360 | 0.12 | 0.30 | 82 | 12 |
| D1TKLL178* | 178 | .385 | 0.10 | 0.25 | 89 | 12 |
| D1TKLL203 | 203 | .440 | 0.08 | 0.20 | 101 | 12 |
| D1TKLL228 | 228 | .490 | 0.06 | 0.15 | 114 | 12 |
| D1TKLL254 | 254 | .550 | 0.05 | 0.12 | 127 | 12 |
| D1TKLL279* | 279 | .605 | 0.04 | 0.10 | 139 | 12 |
| D1TKLL304 | 304 | .660 | 0.03 | 0.05 | 152 | 12 |
| D1TKLL330* | 330 | .720 | 0.02 | 0.02 | 165 | 12 |
| D1TKLL355 | 355 | .770 | 0.02 | 0.02 | 177 | 12 |
| D1TKLL406* | 406 | .880 | 0.02 | 0.01 | 203 | 12 |
| D1TKLL457* | 457 | 1.140 | 0.01 | 0.005 | 228 | 12 |
| D1TKLL508 | 508 | 1.265 | 0.01 | 0.004 | 254 | 12 |
| D1TKLL558 | 558 | 1.390 | 0.01 | 0.003 | 279 | 12 |
| D1TKLL610 | 610 | 1.520 | 0.01 | 0.002 | 305 | 12 |

Common Applications

This ducting is ideal for air conditioning and ventilation of fumes, light duty dust extraction, air movement, as a flexible connection.

Structure

A steel spiral helix embedded between two layers of grey PVC coated polyamid fabric.

Advantages. Easy to store and can be compressed to 1/10 of the extended length. Extremely light weight and compact ducting

Working Temperature.

-5 °C to 80 °C briefly to -20 °C to + 110 °C

Colour. Grey



DUCTPE

EXTRACTAFLEX PE

| Product Code | I.D. mm | O.D. mm | Weight kg/mt | Max W.P Bar | Vacuum MT.H ₂ O | Coil mt |
|--------------|---------|---------|--------------|-------------|----------------------------|---------|
| DUCTPE075 | 75 | - | .20 | 40 | 3.2 | 10 |
| DUCTPE102 | 102 | - | .27 | 34 | 2.8 | 10 |
| DUCTPE127 | 127 | - | .33 | 28 | 2.4 | 10 |
| DUCTPE152 | 152 | - | .40 | 20 | 1.92 | 10 |
| DUCTPE203 | 203 | - | .53 | 10 | 1.20 | 10 |
| DUCTPE254 | 254 | - | .67 | 5 | 0.60 | 5 |
| DUCTPE305 | 305 | - | .80 | 3 | 0.25 | 5 |
| DUCTPE356 | 356 | - | .93 | 1 | 0.16 | 5 |
| DUCTPE406 | 406 | - | 1.07 | 1 | 0.13 | 5 |
| DUCTPE457 | 457 | - | 1.20 | 1 | 0.10 | 5 |
| DUCTPE610 | 610 | - | 1.60 | 1 | .050 | 5 |

Common Applications. Fume extraction ducting. Gas extraction from welding sites. Dust extraction from wood working machines.

Structure. Lightweight, extremely flexible. External metal helix protects against abrasive damage.

Advantages. Easy to store and can be compressed to 1/5 of its extended length.

Working Temperature. -30 °C to + 60 °C

Colour. Green

EXTRACTAFLEX H.D.

CODE: DUCTHD


Working temp. -30 °C to + 120 °C

Colour. Grey

Common applications. Heavy duty dust collection.

Available on request in sizes listed above.



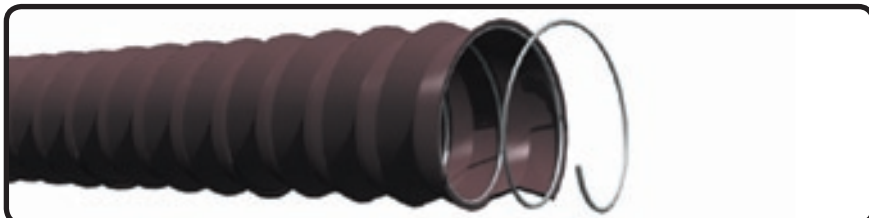

D1RFH

SUPERFLEX CALOR

| Product Code | I.D. mm | O.D. mm | Weight kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|---------|--------------|----------------------------|----------------|---------|
| D1RFH040 | 40 | 46 | .26 | 3 | 40 | 30 |
| D1RFH045 | 45 | 51 | .28 | 3 | 45 | 30 |
| D1RFH050 | 50 | 56 | .31 | 3 | 50 | 30 |
| D1RFH060 | 60 | 66 | .36 | 2.5 | 60 | 30 |
| D1RFH063 | 63 | 70 | .38 | 2.5 | 63 | 30 |
| D1RFH070 | 70 | 77 | .50 | 2.5 | 70 | 30 |
| D1RFH075 | 76 | 83 | .55 | 2.5 | 76 | 30 |
| D1RFH080 | 80 | 87 | .60 | 2.5 | 80 | 30 |
| D1RFH089 | 90 | 97 | .64 | 2.5 | 90 | 30 |
| D1RFH100 | 100 | 107 | .71 | 2.5 | 100 | 10 |
| D1RFH110" | 110 | 117 | .75 | 1.2 | 110 | 10 |
| D1RFH114" | 114 | 121 | 0.76 | 1.2 | 115 | 10 |
| D1RFH120 | 120 | 127 | .80 | 1 | 120 | 10 |
| D1RFH125 | 127 | 134 | .85 | 0.8 | 127 | 10 |
| D1RFH130" | 130 | 137 | .89 | 0.8 | 130 | 10 |
| D1RFH140" | 140 | 147 | .95 | 0.8 | 140 | 10 |
| D1RFH150 | 150 | 157 | 1.0 | 0.8 | 150 | 10 |
| D1RFH160" | 160 | 167 | 1.1 | 0.7 | 160 | 10 |
| D1RFH170" | 170 | 177 | 1.1 | 0.7 | 170 | 10 |
| D1RFH175 | 180 | 188 | 1.2 | 0.5 | 180 | 10 |
| D1RFH200 | 200 | 208 | 1.3 | 0.4 | 200 | 10 |
| D1RFH225 | 225 | 233 | 1.6 | 0.4 | 225 | 10 |
| D1RFH250 | 250 | 259 | 1.9 | 0.4 | 250 | 10 |
| D1RFH300 | 300 | 309 | 2.3 | 0.3 | 300 | 10 |

Common Applications

Can be used in a wide range of applications such as transfer of grain and abrasive material, acid fume extraction, hot air ducting, combustion engine ducting.

Advantages

Long lengths up to 30 metre.

U.V. stabilised and resistant to a large range of chemicals and hydrocarbons.

Ideal for outdoor use.

Structure

Made from TPR rubber with a wire reinforced helix, with excellent flex fatigue.

Temperature Range

-25 °C to 125 °C

Colour. Black



D1TU

TUFLEX

| Product Code | I.D. mm | O.D. mm | Bend Radius Mm | Coil Mt |
|--------------|---------|---------|----------------|---------|
| D1TU051 | 51 | - | 102 | 10 |
| D1TU063 | 63 | - | 126 | 10 |
| D1TU076 | 76 | - | 152 | 10 |
| D1TU102 | 102 | - | 204 | 10 |
| D1TU127 | 127 | - | 254 | 10 |
| D1TU152 | 152 | - | 304 | 10 |
| D1TU178 | 178 | - | 356 | 10 |
| D1TU203 | 203 | - | 406 | 10 |

On request available up to 610 mm I.D.,

Common Applications

Transfer of fumes and shavings.

Advantages.

Indoor use only

Structure.


Neoprene impregnated canvas with steel spiral helix.

Working Temperature.

-30 °C to + 120 °C

Colour. Grey



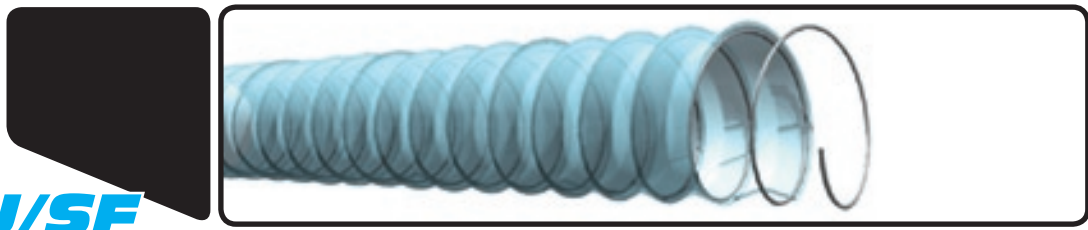

HPU/SF

SUPERFLEX PU L

| Product Code | I.D. mm | Weight kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|-------------------|------------|--------------|----------------------------|----------------|-----------|
| HPU/SF 030 | 30 | .13 | 0.30 | 7 | 30 |
| HPU/SF 035 | 35 | .14 | 0.28 | 8 | 30 |
| HPU/SF 040 | 40 | .15 | 0.25 | 10 | 30 |
| HPU/SF 045 | 45 | .17 | 0.23 | 12 | 30 |
| HPU/SF 050 | 50 | .185 | 0.20 | 13 | 15 |
| HPU/SF 060 | 60 | .22 | 0.16 | 15 | 15 |
| HPU/SF 063 | 63 | .23 | 0.15 | 16 | 15 |
| HPU/SF 070 | 70 | .33 | 0.14 | 18 | 15 |
| HPU/SF 076 | 76 | .35 | 0.10 | 19 | 15 |
| HPU/SF 080 | 80 | .37 | 0.10 | 20 | 15 |
| HPU/SF 090 | 90 | .42 | 0.10 | 22 | 15 |
| HPU/SF 100 | 100 | .48 | 0.09 | 20 | 15 |
| HPU/SF 110 | 110 | .52 | 0.09 | 22 | 15 |
| HPU/SF 120 | 120 | .55 | 0.09 | 24 | 15 |
| HPU/SF 125 | 125 | .59 | 0.08 | 25 | 15 |
| HPU/SF 130 | 130 | .61 | 0.08 | 26 | 15 |
| HPU/SF 140 | 140 | .66 | 0.08 | 28 | 15 |
| HPU/SF 150 | 150 | .70 | 0.06 | 30 | 15 |
| HPU/SF 160 | 160 | .75 | 0.06 | 32 | 15 |
| HPU/SF 170 | 170 | .78 | 0.06 | 34 | 15 |
| HPU/SF 180 | 180 | .83 | 0.06 | 36 | 15 |
| HPU/SF 200 | 200 | .92 | 0.05 | 40 | 15 |
| HPU/SF 220 | 220 | 1.07 | 0.05 | 45 | 15 |
| HPU/SF 250 | 250 | 1.25 | 0.04 | 50 | 15 |
| HPU/SF 300 | 300 | 1.50 | 0.03 | 60 | 10 |
| HPU/SF 350 | 350 | 1.75 | 0.03 | 70 | 10 |
| HPU/SF 400 | 400 | 2.00 | 0.02 | 80 | 10 |
| HPU/SF 450 | 450 | 2.30 | 0.01 | 90 | 10 |
| HPU/SF 500 | 500 | 2.50 | 0.01 | 100 | 10 |
| HPU/SF 600 | 600 | 3.00 | 0.01 | 120 | 10 |

Common Applications

Suction and ducting of dust, saw dust and other abrasive materials, gas as solvent fumes, granules and dusts of chemical products. Conduit with high mechanical protection.

Advantages.

Very flexible hose, high resistance to abrasion traction, oils and fuels, diluted alkaline and acids, UV rays and atmospheric agents.

Suitable for outdoor use as this product is resistant to UV rays and atmospheric agents.


Structure

Clear Polyurethane hose with zinc plated steel spiral. Grounding by connection of both spiral ends.

Working Temperature.

-40 °C to +90 °C
for short periods up to 125 °C max.

Colour. Clear

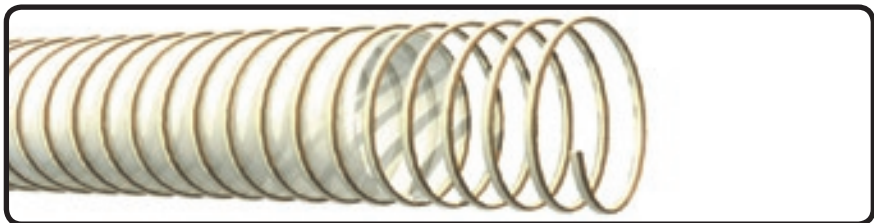

HEPU

OREGON PU ANTISTATIC

| Product Code | I.D. mm | O.D. mm | Weight kg/mt | Vacuum M.H2O | Bend Radius mm | Coil mt |
|----------------|------------|---------|--------------|--------------|----------------|-----------|
| HEPU025 | 25 | - | 0.19 | 4 | 25 | 20 |
| HEPU030 | 30 | - | 0.21 | 4 | 30 | 20 |
| HEPU032 | 32 | - | 0.24 | 4 | 32 | 20 |
| HEPU035 | 35 | - | 0.25 | 4 | 35 | 20 |
| HEPU038 | 38 | - | 0.31 | 4 | 38 | 20 |
| HEPU040 | 40 | - | 0.33 | 3 | 40 | 20 |
| HEPU045 | 45 | - | 0.37 | 3 | 45 | 20 |
| HEPU052 | 50 | - | 0.44 | 3 | 50 | 20 |
| HEPU060 | 60 | - | 0.50 | 3 | 60 | 20 |
| HEPU063 | 63 | - | 0.53 | 3 | 63 | 20 |
| HEPU070 | 70 | - | 0.66 | 3 | 70 | 20 |
| HEPU076 | 75 | - | 0.66 | 3 | 75 | 20 |
| HEPU080 | 80 | - | 0.74 | 3 | 80 | 20 |
| HEPU090 | 90 | - | 0.81 | 3 | 90 | 20 |
| HEPU100 | 100 | - | 0.92 | 3 | 100 | 20 |
| HEPU110 | 110 | - | 1.05 | 3 | 110 | 20 |
| HEPU120 | 120 | - | 1.18 | 3 | 120 | 20 |
| HEPU127 | 125 | - | 1.25 | 3 | 125 | 20 |
| HEPU130 | 130 | - | 1.35 | 3 | 130 | 20 |
| HEPU140 | 140 | - | 1.50 | 3 | 140 | 20 |
| HEPU150 | 150 | - | 1.600 | 3 | 150 | 20 |
| HEPU160 | 160 | - | 1.78 | 3 | 160 | 20 |
| HEPU180 | 180 | - | 2.10 | 3 | 180 | 10 |
| HEPU200 | 200 | - | 2.28 | 3 | 200 | 10 |
| HEPU250 | 250 | - | 2.96 | 3 | 250 | 10 |
| HEPU300 | 300 | - | 3.70 | 3 | 300 | 10 |

Common Applications

Suction and transfer of abrasive materials, powders, grains, cereals, processing scraps and organic materials used in industry, agriculture and gardening.

Characteristics

Smooth bore with excellent resistance to abrasion, atmospheric agents, and attack by micro-organisms.

Suitable for contact with fried food products, good resistance to attack by chemicals. Retains its full diameter even in tight bending radius.

Structure

Clear food grade Polyurethane smooth bore with a spiral in shock resistant rigid white PVC helix and copper braid helix.

Temperature Range

-25 °C to +85 °C

All data refers to performance at 10 C. Any increase of temperature, above or below, will affect the performance data.

We reserve the right to change all data without prior notice.


Colour. Transparent.

Note. Can be specified without copper braid if antistatic properties are not required.

- 25mm is only available without copper braid.

HPU/SFH

SUPERFLEX PU + H

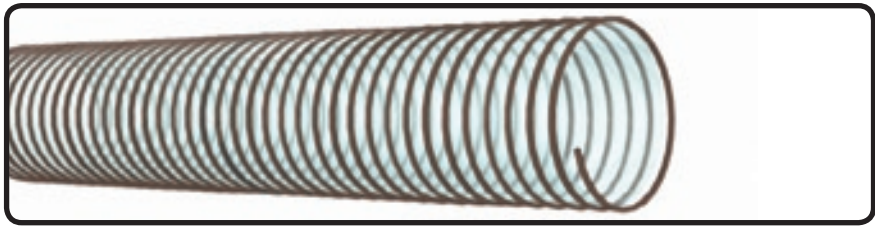

| Product Code | I.D. mm | Weight kg/mt | Max W.P Bar | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|--------------|-------------|----------------------------|----------------|---------|
| HPU/SFH 038 | 38 | .48 | 2.8 | 7.5 | 75 | 30 |
| HPU/SFH 040 | 40 | .52 | 2.6 | 7 | 80 | 30 |
| HPUSFH 045 | 45 | .57 | 2.3 | 6.5 | 90 | 30 |
| HPU/SFH 050 | 50 | .63 | 2.0 | 6 | 100 | 30 |
| HPU/SFH 060 | 60 | .74 | 1.8 | 5 | 120 | 30 |
| HPU/SFH 063 | 63 | .77 | 1.6 | 5 | 125 | 30 |
| HPU/SFH 070 | 70 | .88 | 1.5 | 4.5 | 140 | 30 |
| HPU/SFH 076 | 76 | .94 | 1.3 | 4 | 150 | 30 |
| HPU/SFH 080 | 80 | 1.0 | 1.3 | 4 | 160 | 30 |
| HPU/SFH 090 | 90 | 1.1 | 1.2 | 3.5 | 180 | 30 |
| HPU/SFH 100 | 100 | 1.25 | 1.1 | 3 | 200 | 30 |
| HPU/SFH 120 | 120 | 1.48 | 1.0 | 2.5 | 240 | 30 |
| HPU/SFH 127 | 127 | 1.58 | 0.8 | 2.5 | 250 | 30 |
| HPU/SFH 130 | 130 | 1.63 | 0.8 | 2.5 | 260 | 30 |
| HPU/SFH 140 | 140 | 1.75 | 0.7 | 2 | 280 | 30 |
| HPU/SFH 150 | 150 | 1.84 | 0.7 | 2 | 300 | 30 |
| HPU/SFH 200 | 200 | 2.50 | 0.5 | 1.5 | 400 | 30 |
| HPU/SFH 250 | 250 | 3.80 | 0.4 | 1 | 500 | 15 |
| HPU/SFH 300 | 300 | 4.50 | 0.3 | 1 | 600 | 15 |

Common Applications

Suction and ducting of dust, sawdust and other abrasive material, granules and dusts of chemical products, etc. Conduit with high mechanical protection.

Advantages.

Very flexible hose, smooth inside surface. High resistance to abrasion traction, oils and fuels, diluted alkaline solutions and acids, U.V. rays and atmospheric agents.

Structure

Clear Polyurethane food grade hose with zinc plated steel spiral. Grounding by connection of both spiral ends.

Working Temperature.

-40 °C to +90 °C
for short periods up to 125 °C max.

Colour. Clear

HPU/P

Anti-static PU Ducting



| Product Code | I.D. mm | Wall Thick mm | Weight kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|---------------|--------------|----------------------------|----------------|---------|
| HPU/P051 | 51 | 0.4 | .250 | 2.0 | 40 | 10 |
| HPU/P063 | 63 | 0.4 | .31 | 1.7 | 55 | 10 |
| HPU/P076 | 76 | 0.45 | .51 | 1.7 | 65 | 10 |
| HPU/P102 | 102 | 0.5 | .65 | 1.3 | 85 | 10 |
| HPU/P127 | 127 | 0.5 | .85 | 1.0 | 105 | 10 |
| HPU/P152 | 152 | 0.55 | 1.04 | 0.8 | 125 | 10 |
| HPU/P180 | 180 | 0.55 | 1.05 | 0.5 | 150 | 10 |
| HPU/P203 | 203 | 0.55 | 1.65 | 0.4 | 165 | 10 |
| HPU/P254 | 254 | 0.6 | 2.15 | 0.3 | 210 | 10 |
| HPU/P305 | 305 | 0.6 | 2.65 | 0.3 | 250 | 10 |
| HPU/P356 | 356 | 0.6 | 3.05 | 0.3 | 300 | 10 |
| HPU/P406 | 406 | 0.6 | 3.5 | - | 350 | 10 |

Common Applications

An anti-static HPU/P has a static dissipative additive. This product is not food grade and it should be noted that high levels of abrasion over time will decrease the products static dissipative qualities.


Structure

Transparent Antistatic Polyurethane with embedded copper plated wire helix.

Temperature Range.

0 °C to + 90 °C

Colour: Mildly Transparent with wire spiral.

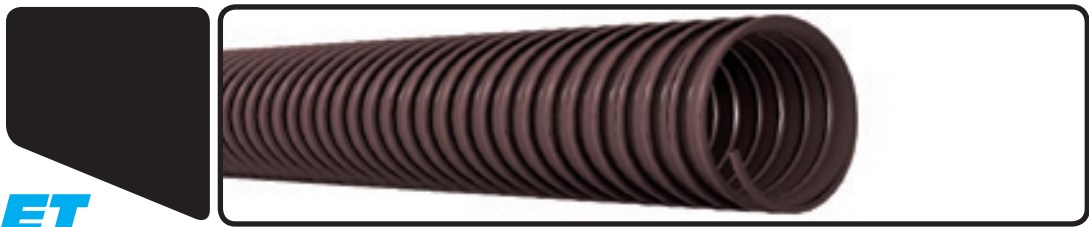

D1DET

DETROIT

| Product Code | I.D. mm | O.D. mm | Weight kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|--------------|---------|---------|--------------|----------------------------|----------------|---------|
| D1DET050 | 52 | 68 | 0.52 | 5.0 | 120 | 30 |
| D1DET060 | 64 | 80 | 0.63 | 3.5 | 150 | 30 |
| D1DET075 | 77 | 93 | 0.75 | 1.5 | 180 | 30 |
| D1DET100 | 103 | 120 | 1.0 | 1.0 | 230 | 30 |
| D1DET125 | 127 | 145 | 1.25 | 0.8 | 280 | 30 |
| D1DET150 | 152 | 172 | 1.5 | 0.6 | 330 | 30 |
| D1DET200 | 205 | 224 | 1.95 | 0.5 | 440 | 20 |

Common Applications

The ducting is designed for the safe and efficient removal of noxious fumes from vehicle workshops and loading bays, air heaters, hot and cold air intake, oil mist extraction systems, dust, fume and chemical extraction.

Advantages.

The ducting will recover its full profile if accidentally run over. Despite its durability the ducting is lightweight and very flexible. Suitable for hose reels. It can be used either from suspended reels or can be connected from exhausts using a suitable baffle.

Excellent high and low temperature resistance.

Structure

A solid nylon crush recoverable helix embedded in a black thermoplastic rubber compound reinforced corrugated cover.

Working Temperature.

-40 °C to +150 °C
170 °C for brief periods.

Colour. Black



HIGH TEMP. W

| Product Code | I.D. mm | Coil mt | Bend Radius mm |
|---------------|---------|---------|----------------|
| Special Order | 51 | 10 | 102 |
| Special Order | 76 | 10 | 152 |
| Special Order | 102 | 10 | 204 |
| Special Order | 127 | 10 | 254 |
| Special Order | 152 | 10 | 304 |
| Special Order | 178 | 10 | 356 |
| Special Order | 203 | 10 | 406 |
| Special Order | 229 | 10 | 458 |
| Special Order | 254 | 10 | 508 |
| Special Order | 305 | 5 | 610 |
| Special Order | 356 | 5 | 712 |

Common Applications

High Temp W is suitable for high temperature working conditions such as foundries.


Structure

It is constructed from PTFE coated glasscloth crimped by a helically wound steel strip.

Temperature Range.

0 °C to +225 °C

Colour. Terra Cotta

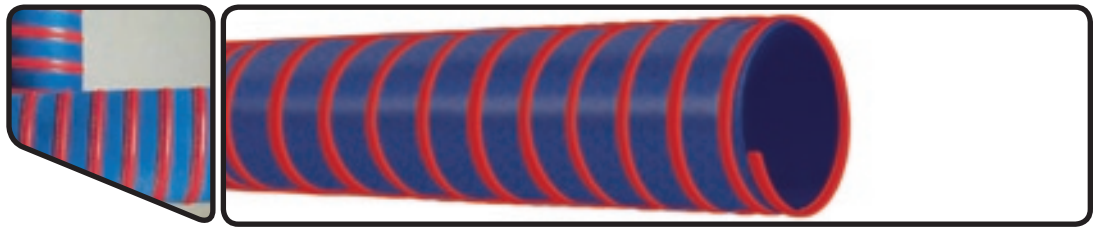

INDUSTROFLEX

| Product Code | I.D. mm | O.D. mm | Weight kg/mt | Vacuum MT.H ₂ O | Bend Radius mm | Coil mt |
|---------------|---------|---------|--------------|----------------------------|----------------|---------|
| SPECIAL ORDER | 127 | - | - | - | 254 | 10 |
| SPECIAL ORDER | 152 | - | - | - | 305 | 10 |
| SPECIAL ORDER | 178 | - | - | - | 356 | 10 |
| SPECIAL ORDER | 203 | - | - | - | 406 | 10 |
| SPECIAL ORDER | 229 | - | - | - | 458 | 10 |
| SPECIAL ORDER | 254 | - | - | - | 508 | 10 |
| SPECIAL ORDER | 280 | - | - | - | 560 | 10 |
| SPECIAL ORDER | 305 | - | - | - | 610 | 10 |
| SPECIAL ORDER | 356 | - | - | - | 712 | 10 |
| SPECIAL ORDER | 381 | - | - | - | 762 | 10 |
| SPECIAL ORDER | 406 | - | - | - | 812 | 10 |
| SPECIAL ORDER | 457 | - | - | - | 914 | 10 |

Common Applications.

Industroflex is a highly flexible, retractable duct eminently suitable for the rapid movement of high volume air blowing.

Working Temperature.

-30 °C to + 120 °C

Colour.

Blue with Red spiral



D1AB

ABRASAFLEX

| Product Code | I.D. mm | O.D. mm | Bend Radius mm | Coil mt |
|---------------|---------|---------|----------------|---------|
| D1AB050 | 51 | - | 306 | 5 |
| D1AB064 | 63 | - | 378 | 5 |
| D1AB076 | 76 | - | 456 | 5 |
| D1AB090 | 89 | - | 534 | 5 |
| D1AB102 | 102 | - | 612 | 5 |
| D1AB114 | 114 | - | 684 | 5 |
| D1AB127 | 127 | - | 762 | 5 |
| D1AB150 | 152 | - | 912 | 5 |
| D1AB176 | 178 | - | 1068 | 5 |
| D1AB203 | 203 | - | 1218 | 5 |
| D1AB230 | 229 | - | 1374 | 5 |
| D1AB254 | 254 | - | 1524 | 5 |
| D1AB280 | 280 | - | 1680 | 5 |
| D1AB305 | 305 | - | 1830 | 5 |
| D1AB355 | 356 | - | 2136 | 5 |
| D1AB406 | 406 | - | 2436 | 5 |
| SPECIAL ORDER | 457 | - | 2742 | 5 |

Common Applications

This ducting is suitable for heavy duty gravity fed abrasive materials.

Structure

Abrasive rubber lining, synthetic fabric with embedded steel wire helix.

Temperature Range

-30 °C to + 120 °C

Colour.

Black



D1FL

Fabric Reinforced TPR

| Product Code | I.D. mm | Wall Thick mm | Weight Kg/mt | Vacuum MT.H ₂ O | Bend Radius Mm | Coil Mt |
|--------------|---------|---------------|--------------|----------------------------|----------------|---------|
| D1FL050 | 51 | 0.4 | .210 | 2 | 40 | 10 |
| D1FL064 | 63 | 0.4 | .260 | 1.7 | 55 | 10 |
| D1FL076 | 76 | 0.4 | .390 | 1.7 | 65 | 10 |
| D1FL090 | 90 | 0.4 | .450 | 1.6 | 75 | 10 |
| D1FL102 | 102 | 0.4 | .495 | 1.3 | 85 | 10 |
| D1FL127 | 127 | 0.4 | .690 | 1.2 | 105 | 10 |
| D1FL152 | 152 | 0.4 | .910 | 1.0 | 125 | 10 |
| D1FL160 | 160 | 0.4 | .950 | 0.7 | 130 | 10 |
| D1FL180 | 180 | 0.4 | 1.20 | 0.5 | 150 | 10 |
| D1FL203 | 203 | 0.4 | 1.32 | 0.4 | 165 | 10 |
| D1FL228 | 228 | 0.4 | 1.49 | 0.4 | 185 | 10 |

SPECIAL ORDER UP TO-----406

Common Applications.

Transfer of abrasive powders, fumes and shavings at high temperatures.

Advantages

Extremely resistant to high temperatures, chemicals and abrasion.
Tear resistant.

Structure.

Coated with PP/EPDM fabric with embedded steel spiral helix.

Working Temperature.

-40 °C to + 135 °C (intermittently up to 150 °C).

Colour. Black



Custom Made Ducting

Common Application:

Tailor made to suit specific applications in Construction, Civil Engineering + industrial applications.

Advantages:

Cuffed ends (no wire) for easy leak proof clamping.
Permanently attached eyelets, hooks or handles.
Tapered Diameters

Structure:

Manufactured by spirally sewing a variety of materials around a spring steel helix.
(Stainless Steel wire is available).

W.Temp. -40 C to + 140 C

Colour: Various.



Fittings

Bauer Type
Air-Pressure Couplings
Ground Joint Couplings
Lumpends, Nut & Tails.
Food Grade
H.D. Industrial
Ball Valves
Muff Coupling
Camlocks

Rubber Hose

Water Delivery/Suction
Air Fabric/Steel
Twinweld Oxy/Acetane
Twinweld Oxy/Lpg
Vacuum & Airbrake
Greaseproof Steam
Hot Wash
Sand Blast
Fire Reel
Hot Air
Fuel Dispenser
Wine & Fuel Delivery
Material Handling
Car Heater
Multi-Purpose
Mine Dewatering
Dry Cement
Radiator Hose

Sheet Rubber

Insertion - Natural
Insertion - Neoprene
White-Faced Insertion
Natural
Neoprene
Nitrile
Silicone
Viton
Butyl
White Hygienic Natural
White Hygienic Nitrile

Power Transmission

Total Drive Plus Vee Belts
Contitech Transmission Products
Jason Torque Plus Mower Belts
Jason Acculink
Variable Speed
Poly Vee
Wedgelink/Brammer
Conveyor Belt Fasteners
Multi-Band Belts
Pulleys - Aluminium
Pulleys - Taperlock
Skirting Rubber
Timing Belts
Timing Pulleys
HTD Timing Belts
CXP Timing Belts

WWW.TOTALRUBBER.COM.AU

P.V.C HOSE

Water - Hot & Cold
Potable Water
Waste Water
Irrigation
Sullage - Sludge
Sewerage
Sea Water
Air
Food - Beverage
Pesticide-Weedicide
Pressure Spray
Fire Reel
Air Seeder
Petroleum - Oil
Olive Oil
Milk - Wine
Abrasive Materials

Tubing

Neoprene
Natural Rubber
P.V.C Clear
Nylon
Silicone
LDPE

Hose Accessories

Sanitary Couplers
Camlock Fittings
Air Hose Fittings
Super Clamps
Tridon Worm Drive Clamps
Bauer couplings
Flanged Hosetails
Jamec Airline Fittings
Poly Nut & Tails
Compressor Couplings
Ground Joint Couplers
Strainers - Baskets
Lumpends - Joiners



PH: 1300 720 655
FAX: 1300 720 677

TR TOTAL RUBBER